





Approval	C  US		
Electrical			
Standard	UL	IEC	
Rated voltage	300V	450V	
Rated current	20A	32A	
Wire range	22-12AWG	4.0mm ²	
With standing voltage	AC2000V/1Min		
Insulation Resistance	500M Ω /DC500V		
Mechanical			
Max. Torque Value	1.2N.m 10.6Lb.in		
Ambient temperature	-40℃~+105℃		
Dimensions			
Pitch	10.0mm(.394")		
Poles	2P-24P		
Material			
Housing	PA66,UL94V-0		
Terminal	Brass,0.8t,Tin Plated		
Screws	Steel,M4 Ni Plated		

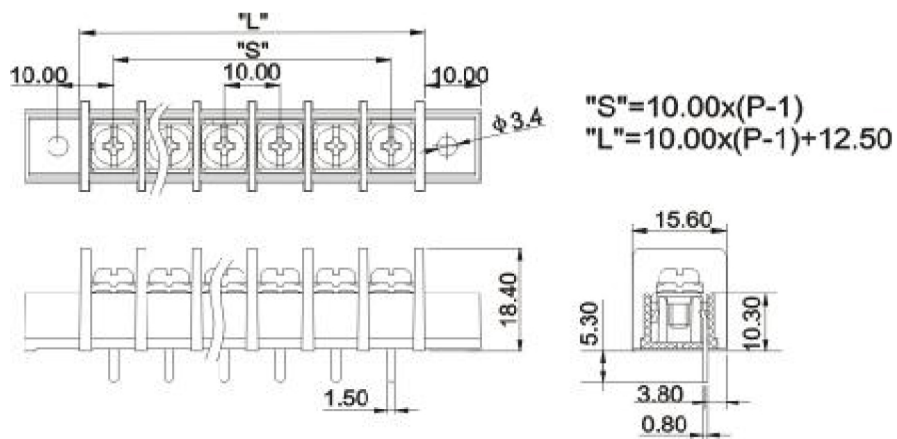

HOW TO ORDER :

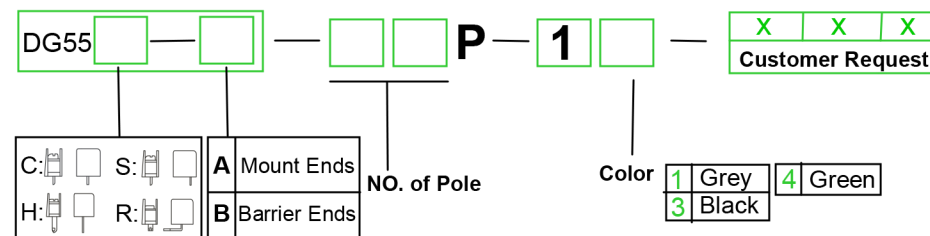

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	22.50	32.50	42.50	52.50	62.50	72.50	82.50	92.50	102.50	112.50	122.50	132.50	142.50	152.50
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	162.50	172.50	182.50	192.50	202.50	212.50	222.50	232.50	242.50	252.50	262.50			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

	China · Kang Wei electronics co., LTD
 THIRD ANGLE PROJECTION	NAME 55S-A