



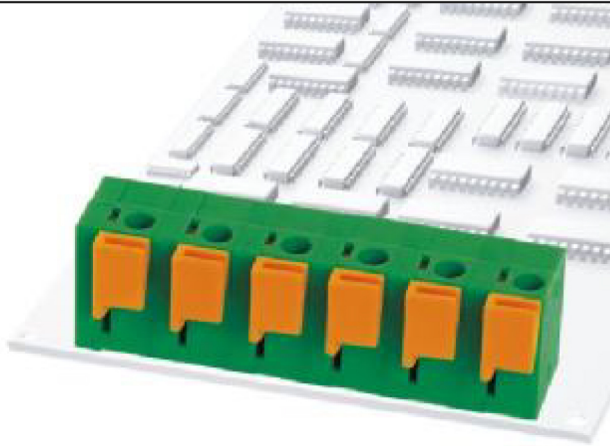

142V-7.62

PCB LAYOUT

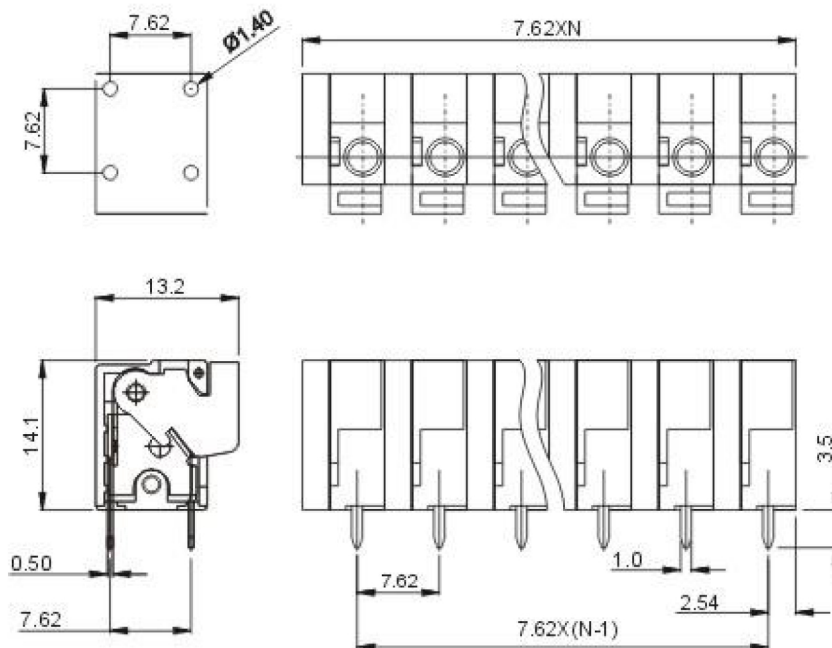

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

450V

10A

15A

22-16AWG

0.2-1.5mm²

AC2500V/1Min

Mechanical

Ambient temperature

Strip length

-40°C~+105 °C

10mm

Dimensions

Pitch

Poles

7.62mm(.300")

1P-XXP

Material

Housing

Pin header

Wire guard

PA66,UL94V-0

Brass,Tin plated

Stainless steel

HOW TO ORDER :

	-		P	-		-	
							Customer Request

Series number No. of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White