

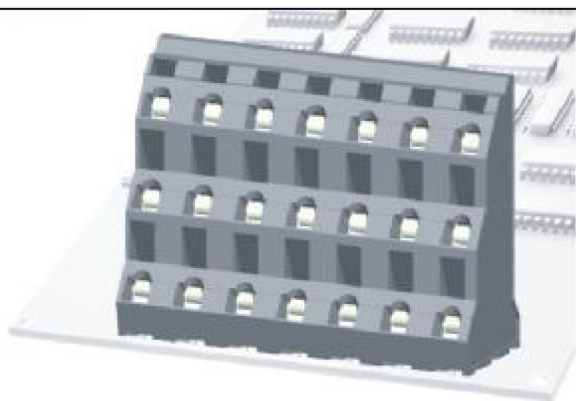



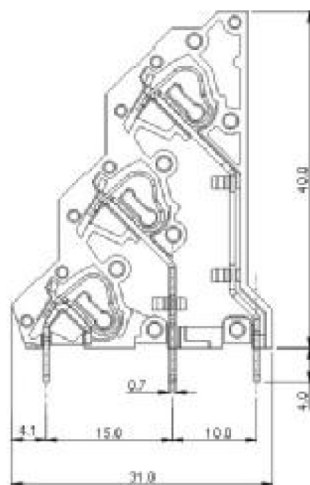

245H3-7.5
245H3-7.62

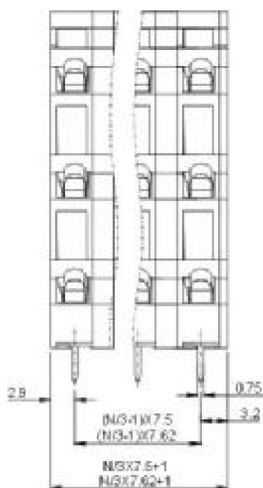

PCB LAYOUT

Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	10A	12A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage	AC3000V/1Min	
Mechanical		
Ambient temperature	-40℃~+105℃	
Strip length	5-6mm	
Dimensions		
Pitch	7.5mm(.295") 7.62 (.300")	
Poles	2 x (1P-XXP)	
Material		
Housing	PA66,UL94V-0	
Pin header	Copper,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

	-	P	-	1	-	X X X																					
Series number		No.of pole		Color		Customer Request																					
		<table border="1"> <tr> <td>1</td> <td>Single pitch</td> </tr> <tr> <td>2</td> <td>Double pitch</td> </tr> </table>	1	Single pitch	2	Double pitch		<table border="1"> <tr> <td>1</td> <td>Grey</td> <td>4</td> <td>Green</td> <td>7</td> <td>Trans Parent</td> </tr> <tr> <td>2</td> <td>Blue</td> <td>5</td> <td>Orange</td> <td>8</td> <td>Yellow</td> </tr> <tr> <td>3</td> <td>Black</td> <td>6</td> <td>Red</td> <td>9</td> <td>White</td> </tr> </table>	1	Grey	4	Green	7	Trans Parent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	White	
1	Single pitch																										
2	Double pitch																										
1	Grey	4	Green	7	Trans Parent																						
2	Blue	5	Orange	8	Yellow																						
3	Black	6	Red	9	White																						