

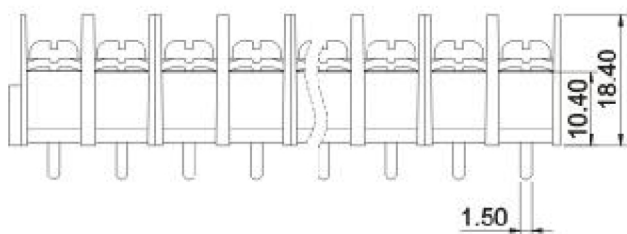
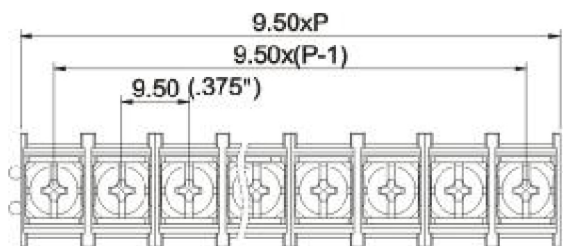


45S-B-60A



Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L (mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90	106.40	115.90	125.40	134.90	144.40
S (mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L (mm)	153.90	163.40	172.90	182.40	191.90	201.40	210.90	220.40	229.90	239.40	248.90			
S (mm)	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00	237.50			

Approval

Electrical

Standard	UL	IEC
Rated voltage	300V	750V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
With standing voltage	AC2000V/1Min	
Insulation Resistance	500M Ω /DC500V	

Mechanical

Max. Torque Value	1.2N.m 10.6Lb.in
Ambient temperature	-40℃~+105℃




Dimensions

Dimensions	
Pitch	9.5mm(.375")
Poles	2P-22P

Material

Housing	PA66,UL94V-0
Terminal	Brass,0.8t,Tin Plated
Screws	Steel,M4 Ni Plated

HOW TO ORDER :

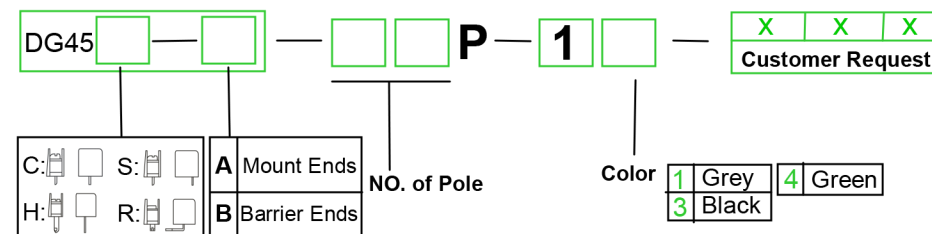

THROANGLE PROJECTION