



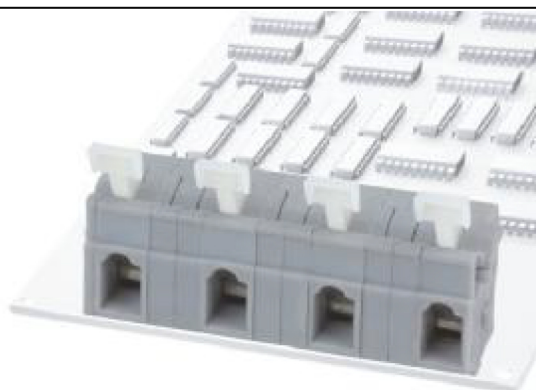

242R-10.0
242R-10.16

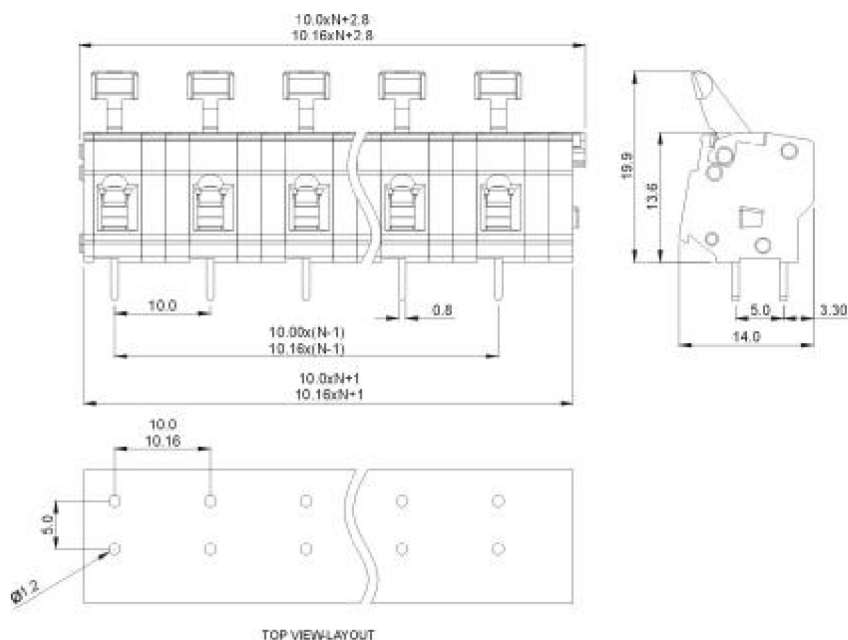

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

15A

28-12AWG

AC2000V/1Min

IEC

1000V

17A

0.2-2.5mm²

Mechanical

Ambient temperature

Strip length

-40℃~+105℃

5-6mm

Dimensions

Pitch

Poles

10.0mm(.394") 10.16 (.400")

1P-XXP

Material

Housing

Pin header


Wire guard

PA66,UL94V-0

Phosphor bronze,Tin plated

Stainless steel

HOW TO ORDER :

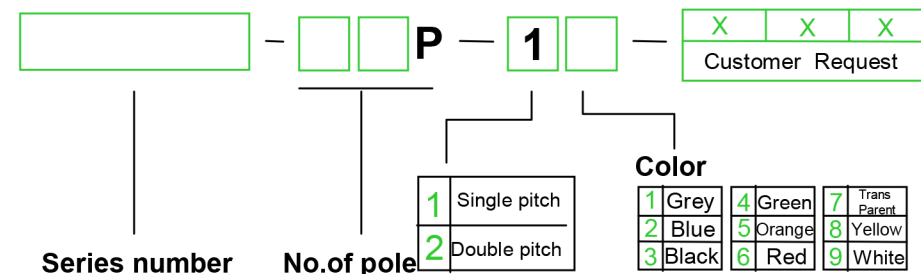

mm (INCH)	 China · Kang Wei electronics co., LTD	
THIROANGLE PROJECTION	NAME 242R-10.0, 242R-10.16	