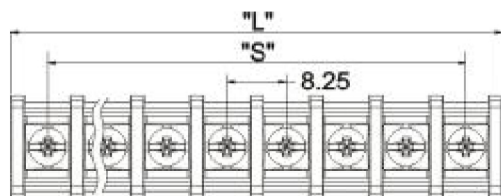

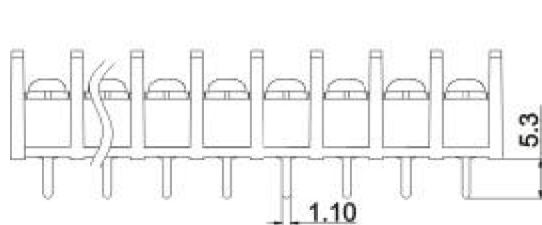


35C-B


$$\begin{aligned} "S" &= 8.25 \times (P-1) \\ "L" &= 8.25 \times (P-1) + 10.15 \end{aligned}$$


Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40	92.65	100.90	109.15	117.40	125.65
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	133.90	142.15	150.40	158.65	166.90	175.15	183.40	191.65	199.90	208.15	216.40			
S(mm)	23.75	32.00	40.25	48.50	56.75	65.00	73.25	81.50	89.75	98.00	106.25			

Approval	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	32A
Wire range	22-12AWG	4mm ²
With standing voltage	AC1600V/1Min	
Insulation Resistance	500M Ω /DC500V	
Mechanical		
Max. Torque Value	0.5N.m 4.4Lb.in	
Ambient temperature	-40℃ ~+105℃	
Dimensions		
Pitch	8.25mm(.325")	
Poles	2P-26P	
Material		
Housing	PA66,UL94V-0	
Terminal	Brass,0.8t,Tin Plated	
Screws	Steel,M3 Ni Plated	

HOW TO ORDER :

