
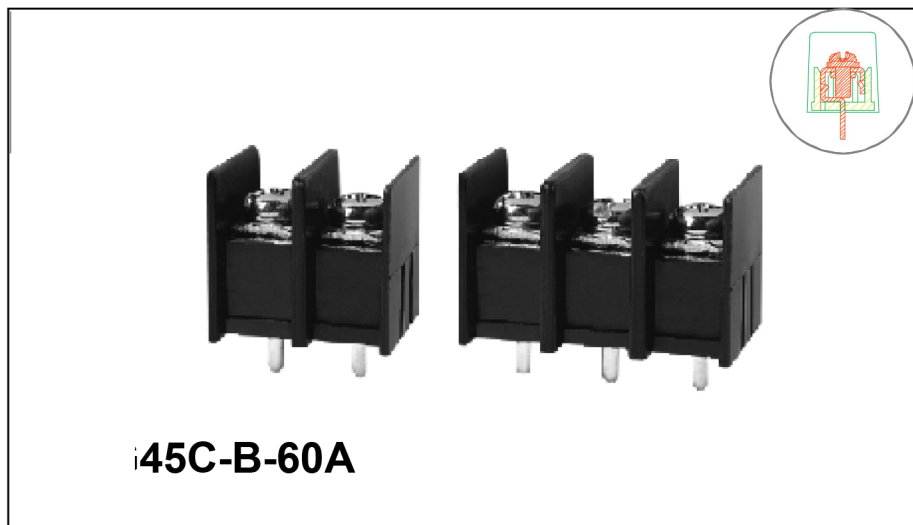


Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90	106.40	115.90	125.40	134.90	144.40
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.90	163.40	172.90	182.40	191.90	201.40	210.90	220.40	229.90	239.40	248.90			
S(mm)	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00	237.50			

Approval	
Electrical	
Standard	UL IEC
Rated voltage	300V 750V
Rated current	25A 32A
Wire range	22-12AWG 4.0mm ²
With standing voltage	AC2000V/1Min
Insulation Resistance	500M Ω /DC500V
Mechanical	
Max. Torque Value	1.2N.m 10.6Lb.in
Ambient temperature	-40℃ ~+105℃
Dimensions	
Pitch	9.5mm(.375")
Poles	2P-24P
Material	
Housing	PA66,UL94V-0
Terminal	Brass,0.8t,Tin Plated
Screws	Steel,M4 Ni Plated

HOW TO ORDER :

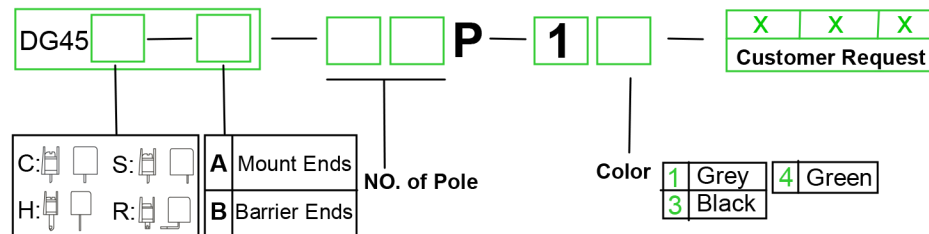

	 China · Kang Wei electronics co., LTD
	NAME 45C-B-60A