
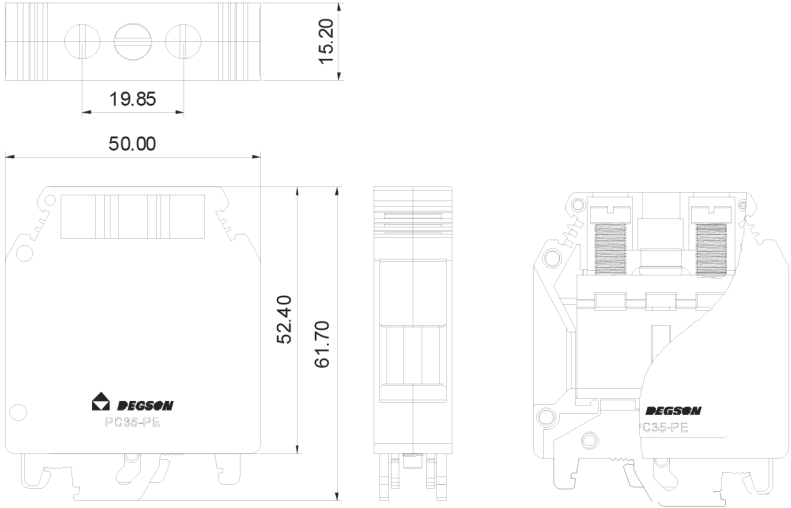


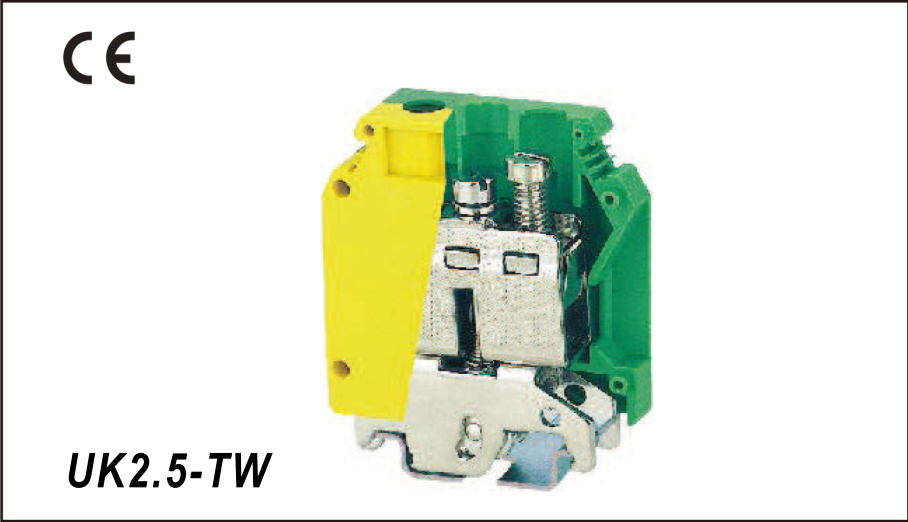

Approval	CE	
Capability		
Standard	UL	IEC
Rated Voltage	-	-
Rated Current	-	-
Wire size	18-2AWG	0.2-35mm ²
T/W/End plate	15.2/50/-mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	62/69.5/67mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	15mm	
Terminal screw: thread/torque	M6/2.5N.m/22Lb-in	
Mounting screw: thread/torque	M5/2.0N.m/17.5Lb-in	
Internal cylindrical gage	B9	
Insulating Material/Inflammability class	PAV-0	
Specification	Model	Pieces
(1)Ground terminal block	PC 35-PE	50
(2)Zack strip	ZB 10	200

HOW TO ORDER :

-

P

-

1

-

X

X

X

Customer Request

Series No.

No. of pole

Color

1 Gray

2 Blue

3 Black

4 Green

5 Orange

6 Red

7 Transp-arent

8 Yellow

9 white

mm (INCH)	 China · Kang Wei electronics co., LTD
THIROANGLE PROJECTION	NAME UK2.5-TW