



CE



UKMT 2.5

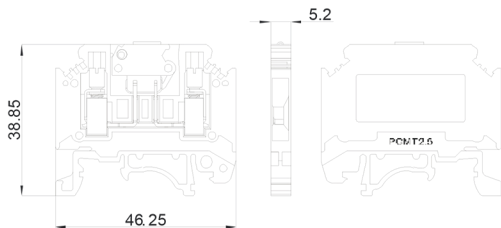

Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15/NS32)

Rated surge voltage/Contamination class

Stripping length

Screw thread/Tightening torque

Internal cylindrical gage

Insulating material/Inflammability class

CE

UL

300V

16A

24-12AWG

5.2/46/1mm

51.5/59/56mm

6KV/3

7mm

M3/0.5N.m/4.5Lb-in

A3

PA/V-0

0.2-2.5mm²

Specification

(1)Knife disconnect terminal block

(2)Cover

(3)Insertion bridge

(4)Partition plate

(5)Zack strip

Model

PCMT2.5

D-PCMT2.5

EB 2-5

EB 3-5

EB10-5

ATS-MTK

ZB5

Pieces

50

100

150

150

50

50

300

HOW TO ORDER :

- P - 1 - -
 Customer Request

Series No.

No. of pole

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



THROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

UKMT 2.5