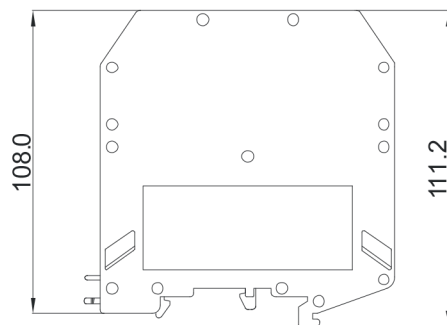
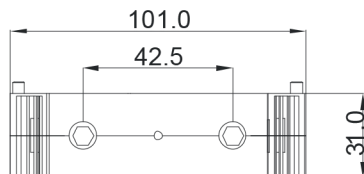
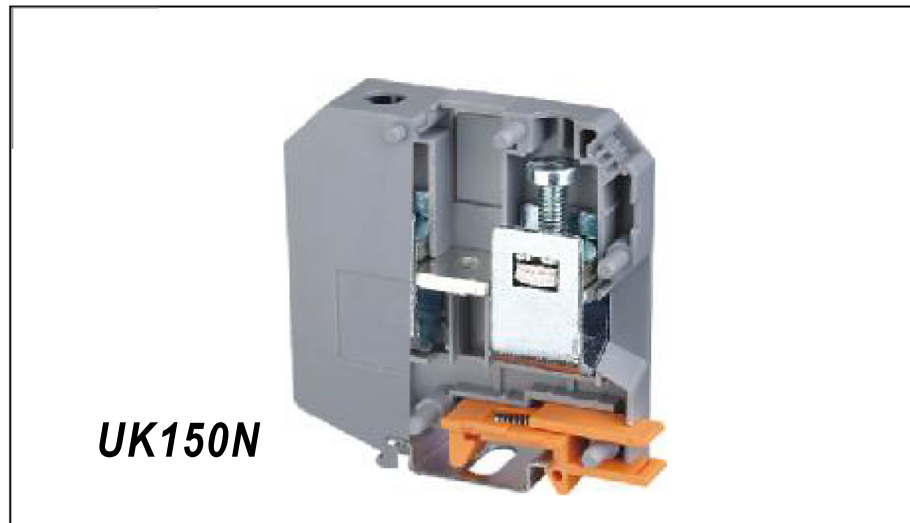


Approval		
Capability		
Standard	UL	IEC
Rated Voltage	1100V	1000V
Rated Current	265A	309A
Wire size	2-300MCM	50-150mm ²
T/W/End plate	31/100/-mm	
Height(mm)(NS35.7.5/NS35.15/NS32)	-/118.5/116mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	40mm	
Screw thread/Tightening torque	M10/4.0N.m/35Lb-in	
Internal cylindrical gage	B14	
Insulating Material/Inflammability class	PA/V-0	

HOW TO ORDER :

	-	P	-	1	-	<table border="1"> <tr> <td>X</td><td>X</td><td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request														
X	X	X																						
Customer Request																								
Series No.		No. of pole		Color		<table border="1"> <tr> <td>1</td><td>Gray</td> <td>4</td><td>Green</td> <td>7</td><td>Transp-arent</td> </tr> <tr> <td>2</td><td>Blue</td> <td>5</td><td>Orange</td> <td>8</td><td>Yellow</td> </tr> <tr> <td>3</td><td>Black</td> <td>6</td><td>Red</td> <td>9</td><td>white</td> </tr> </table>	1	Gray	4	Green	7	Transp-arent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	white
1	Gray	4	Green	7	Transp-arent																			
2	Blue	5	Orange	8	Yellow																			
3	Black	6	Red	9	white																			

mm (INCH) THIROANGLE PROJECTION	 China · Kang Wei electronics co., LTD
NAME	UK150N