

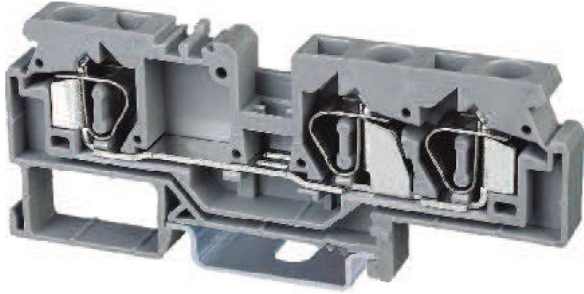


UL US CE

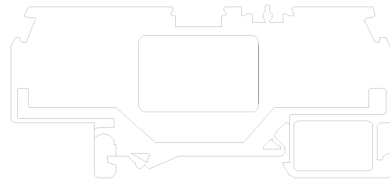

WD1-4B

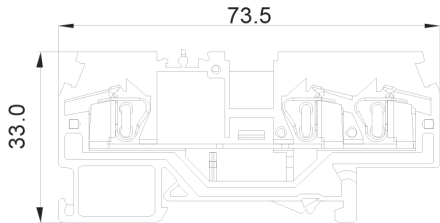

Approval

UL US

CE

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15)

Rated surge voltage/contamination class

Stripping length

Insulating material/Inflammability class

UL

600V

20A

28-12AWG

IEC

800V

32A

0.2-4.0mm²

6/73.5/2.5mm

36.5/44mm

8KV/3

10mm

PA/V-0

HOW TO ORDER :

- P - -

X	X	X
Customer Request		


Series No.

No.of pole

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

mm
(INCH)



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

WD1-4B