

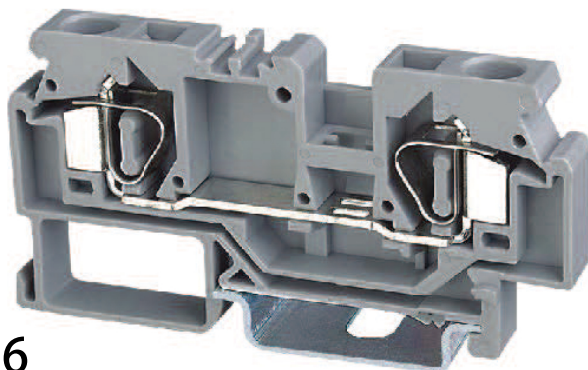


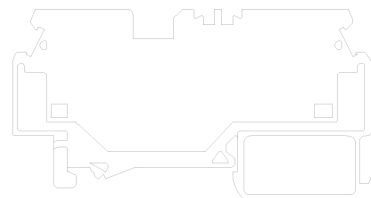

WD1-6

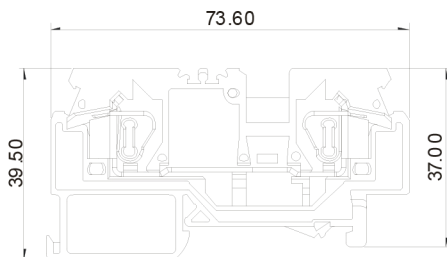

Approval	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	600V	800V
Rated current	30A	41A
Wire size	24-10AWG	0.2-6.0mm ²
T/W/End plate		8/74.5/2.5mm
Height(NS35:7.5/NS35:15)		40/47.5mm
Rated surge voltage/contamination class		8KV/3
Stripping length		10mm
Insulating material/Inflammability class		PAV-0



HOW TO ORDER :

- P - -

X	X	X
Customer Request		

Series No. No.of pole Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

WD1-6