
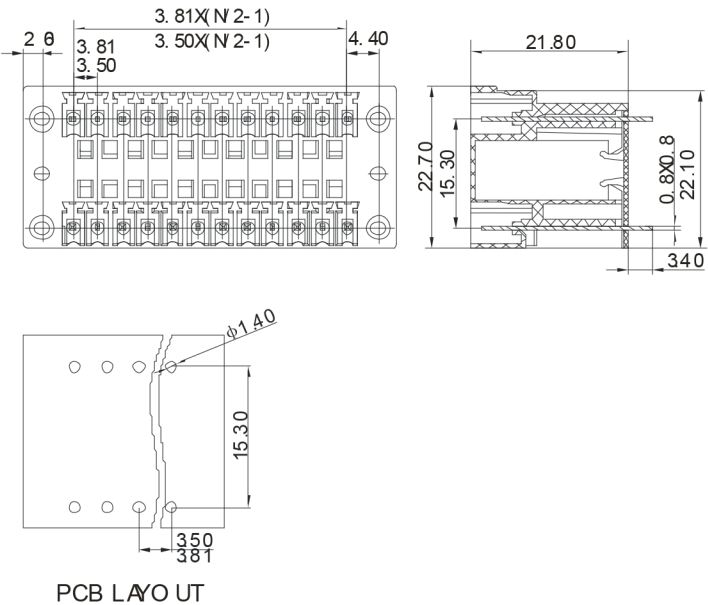


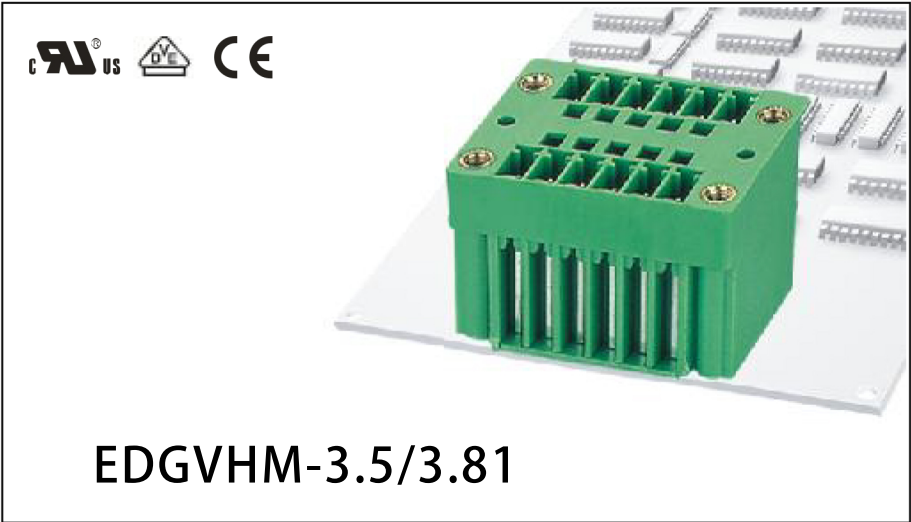

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Rated impulse voltage	2.5KV	
Mechanical		
Ambient temperature	-40℃~+105℃	
Dimensions		
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2*(2P-20P)	
Material		
Housing	PA66,UL94 V-0	
Pin header	Brass,Tin-plated	
Nut	M2.5,Brass	

HOW TO ORDER :

P

1

X

X

X

Customer Request

Series number

No.of pole

1

Single pitch

2

Double pitch

Color

1

Grey

2

Blue

3

Black

4

Green

5

Orange

6

Red

7

Trans Parent

8

Yellow

9

White