





WD2-6

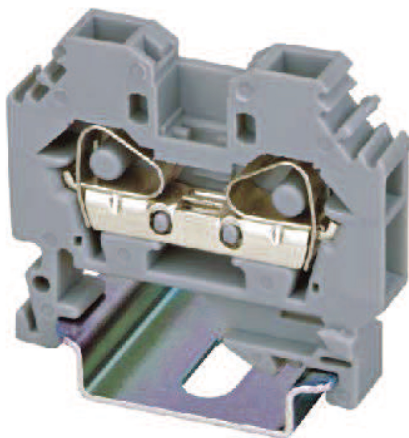

Approval

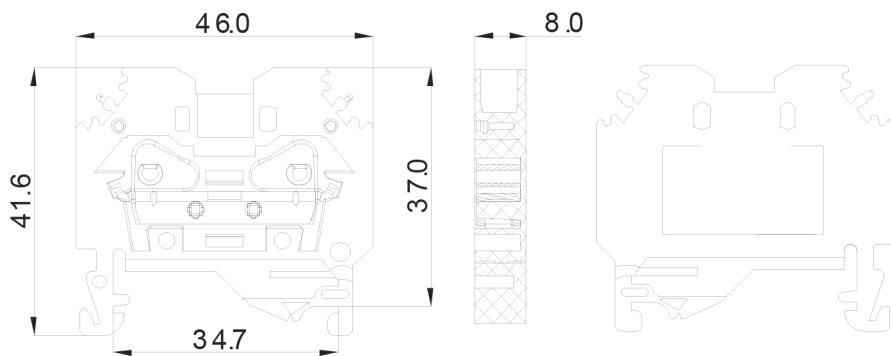

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15)

Rated surge voltage/contamination class

Stripping length

Insulating material/Inflammability class

UL

600V

30A

24-10AWG

IEC

800V

41A

0.2-6.0mm²

8/46.5/2.5mm

44.5/52mm

8KV/3

12mm

PA/V-0

HOW TO ORDER :

Series No.

P

No.of pole

Color

Customer Request

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

WD2-6