





China · Kang Wei electronics co., LTD



Product Specification

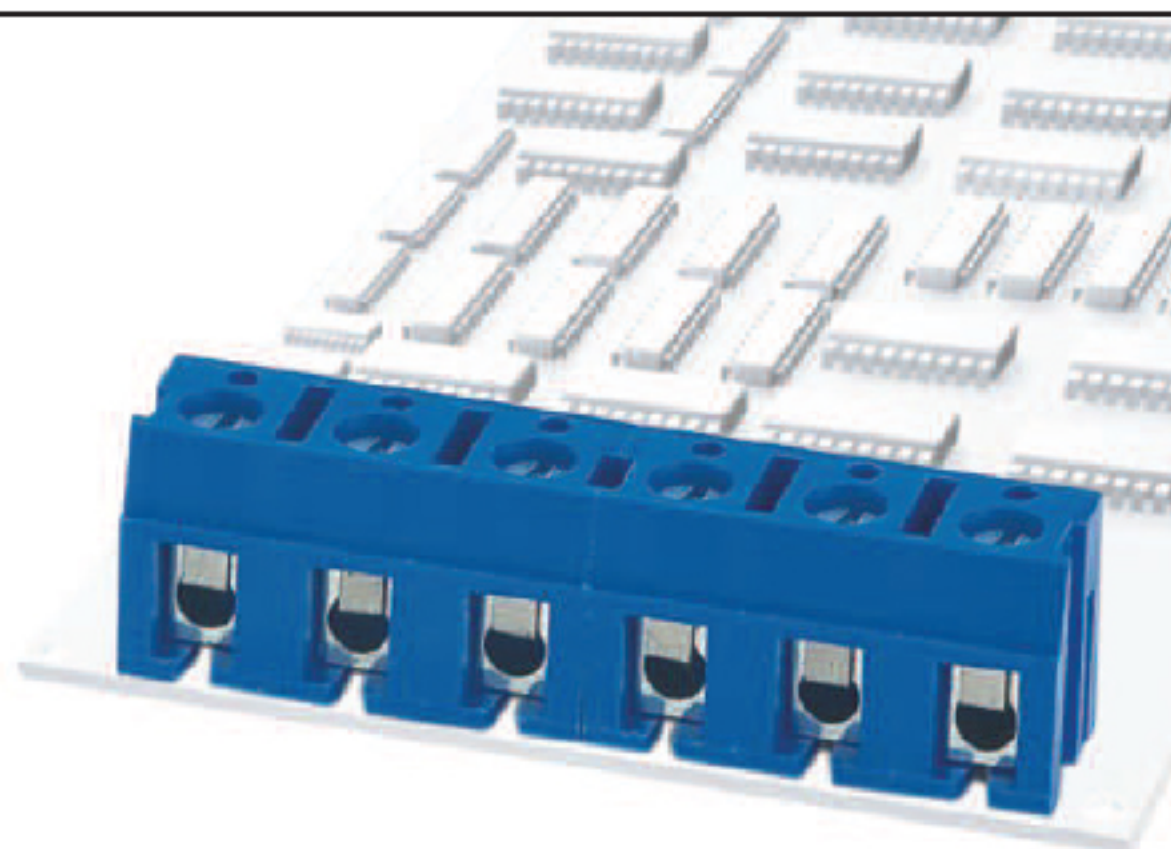

KV300-7.5

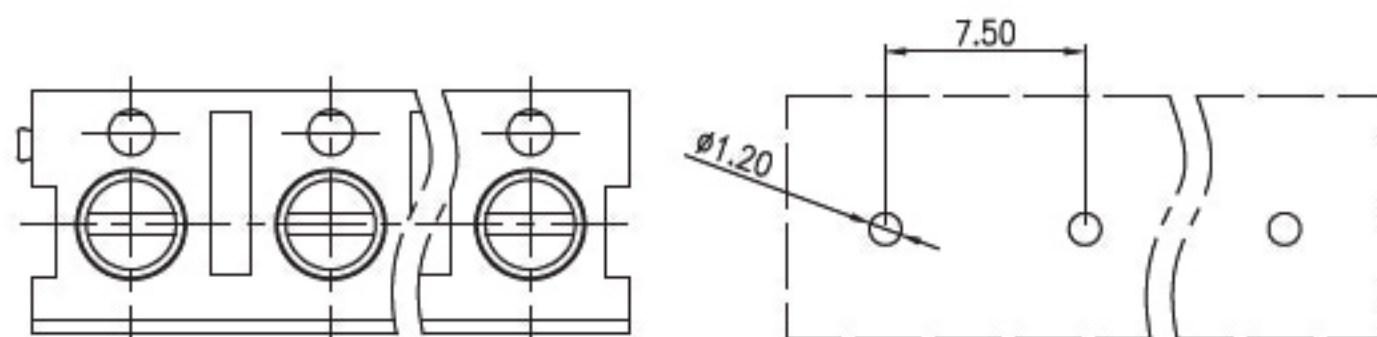

TOP VIEW-LAYOUT

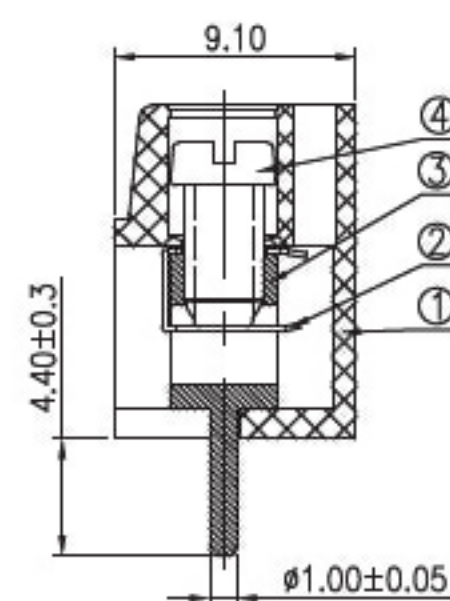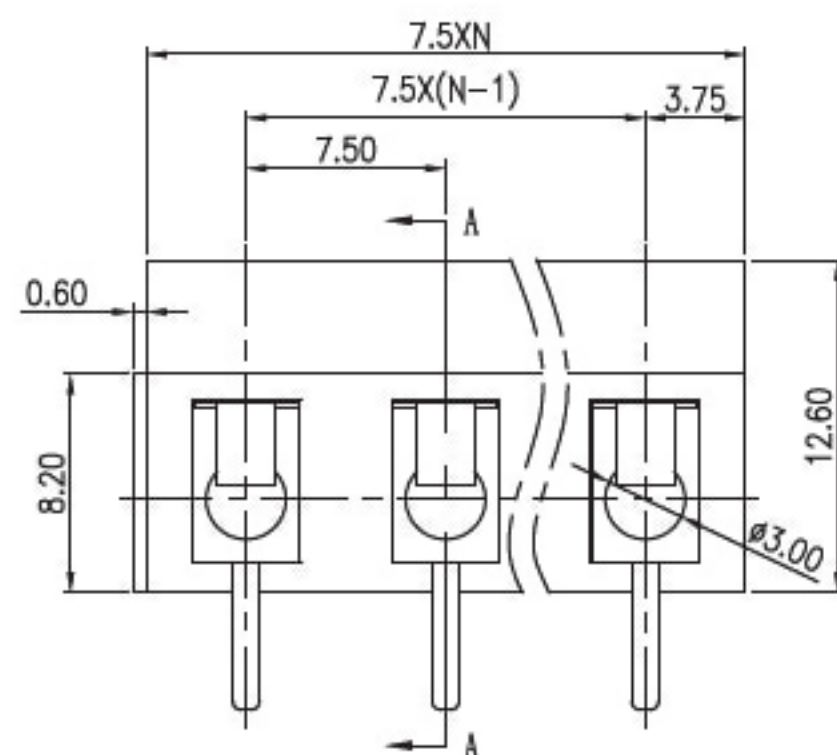

SECTION A-A

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

10A

22-14AWG

IEC

450V

24A

2.5mm²

AC2500V/1Min

Mechanical

Torque

0.5Nm(4.4Lb-In)

Ambient temperature

-30°C~+120 °C

Strip length

5-6mm

Dimensions

Pitch

7.5mm(.295")

Poles

2P,3P-24P

Material

Housing

PBT,UL94V-0

Screws

M3,steel, Cr³⁺ Zn-plated

Pin header

Brass,Tin plated

Wire guard

Stainless steel

HOW TO ORDER :

DG300-7.5

□

□

P

1

□

X

X

X

Customer Request

Series number


No.of pole

1 Single pitch
2 Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

mm
(INCH)



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

KV 300-7.5