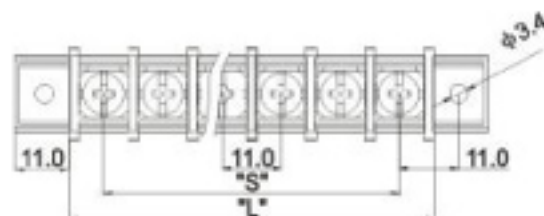




67 338 1.6 24 100 1341 32 101 63 10720 63 1104 61 100 5000

7/11/2014 19

[illegible]


$$S = 11.0 \times (P - 1)$$

$$L = 11.0 \times (P - 1) + 13.0$$

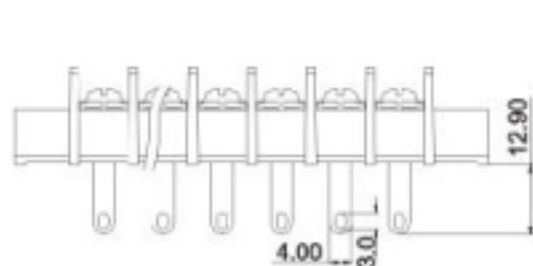

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	24.00	35.00	48.00	57.00	68.00	79.00	90.00	101.00	112.00	123.00	134.00	145.00	156.00	167.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	178.00	189.00	200.00	211.00	222.00	233.00	244.00	255.00	266.00	277.00	288.00			
S(mm)	65.00	135.00	187.00	198.00	209.00	220.00	231.00	242.00	253.00	264.00	275.00			

认证	UL		CE
电气性能			
参考标准	UL	IEC	
额定电压	300V	750V	
额定电流	20A	32A	
导线线径	22-12AWG	4.0mm ²	
耐电压	AC2000V/1Min		
绝缘阻抗	500MΩ/DC500V		
机械性能			
最大锁紧扭力	1.2N.m 10.6Lb.in		
环境温度	-40℃~+105℃		
尺寸			
间距	11.0mm(.433")		
极数	2P-20P		
材质及电镀			
塑件	PA66,UL94V-0		
端子	黄铜,1.0厚 镀锡		
螺丝	钢,M4镀锌		

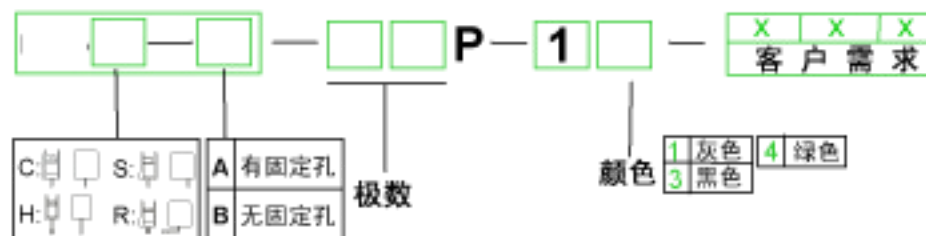

	中国·康伟电子有限公司
	NAME KV65H-A