





康伟栅栏式PCB接线端子

产品规格书

UL US CE



KV75GH-A

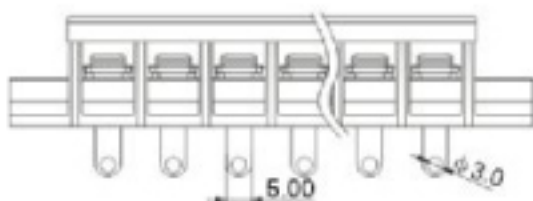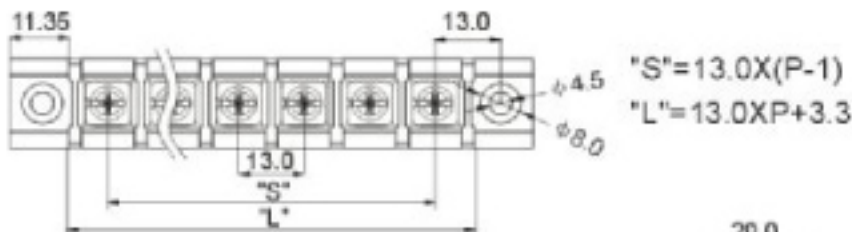

认证

电气性能

参考标准

额定电压

额定电流

导线线径

耐电压

绝缘阻抗

机械性能

最大锁紧扭力

环境温度

尺寸

间距

极数

材质及电镀

塑件

端子

螺丝

UL

CE

UL

600V

40A

18-10AWG

IEC

750V

41A

6.0mm²

AC2000V/1Min

500MΩ/DC500V

1.2N.m 10.6Lb.in

-40℃~+105℃

13.0mm(.512")

2P-16P

PA66+23%GF, UL94V-0

黄铜, 1.0厚, 镀锡

铜, M4镀锌

订购方式:

□ □ □ P - 1 □ - X X X
客户需求

C: □ S: □
H: □ R: □

A 有固定孔
B 无固定孔

极数

颜色 1 灰色 4 绿色
3 黑色

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	29.30	42.30	55.30	68.30	81.30	94.30	107.30	120.30	133.30	146.30	159.30	172.30	185.30	198.30
S(mm)	13.00	26.00	39.00	52.00	65.00	78.00	91.00	104.00	117.00	130.00	143.00	156.00	169.00	182.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	211.30	224.30	237.30	250.30	263.30	276.30	289.30	302.30	315.30	328.30	341.30			
S(mm)	113.00	126.00	139.00	152.00	165.00	178.00	191.00	204.00	217.00	230.00	243.00			

mm
(INCH)



TERMINAL ORIENTATION



中国·康伟电子有限公司

NAME

KV75GH-A