


康伟栅栏式PCB接线端子

产品规格书



UL US CE



KV55GS-B

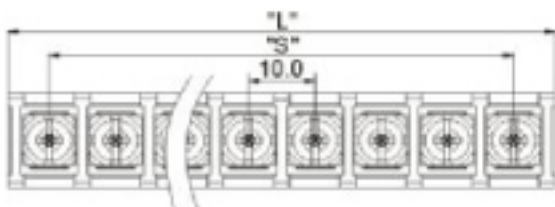

$$S = 10.00 \times (P - 1)$$
$$L = 10.00 \times P + 3.16$$

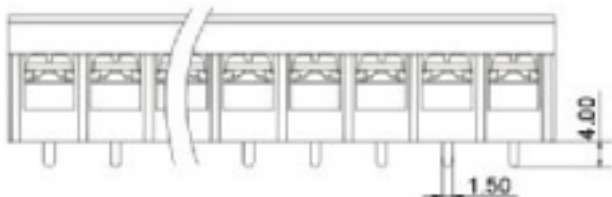

认证

电气性能

参考标准

额定电压

额定电流

导线线径

耐电压

绝缘阻抗

机械性能

最大锁紧扭力

环境温度

尺寸

间距

极数

材质及电镀

塑件

端子

螺丝

UL

CE

UL

IEC

300V

750V

20A

32A

22-12AWG

4.0mm²

AC2000V/1Min

500MΩ/DC500V

1.2N.m 10.6Lb.in

-40℃~+105℃

10.0mm(.394")

2P-23P

PA66+23%GF, UL94V-0

黄铜, 0.8mm 镀锡

铜, M4镀锌

订购方式:

□ □ □ P - 1 □ - X X X
客户需求

C: □ S: □
H: □ R: □
A 有固定孔
B 无固定孔

极数

颜色 1 灰色 4 绿色
3 黑色

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16	143.16	153.16
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	253.16	263.16			
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00

mm
(INCH)



TERMINAL BLOCK ORIENTATION



中国·康伟电子有限公司

NAME

KV55GS-B