


公差表/General Tolerances(mm)	
0	>3
~3	~6
~6	~10
~10	~18
~18	~30
~30	~50
~50	~80
~80	~120
~120	~180
~180	~250
~250	~315
~315	~400
~400	~500
~500	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±2	0.1/1.0

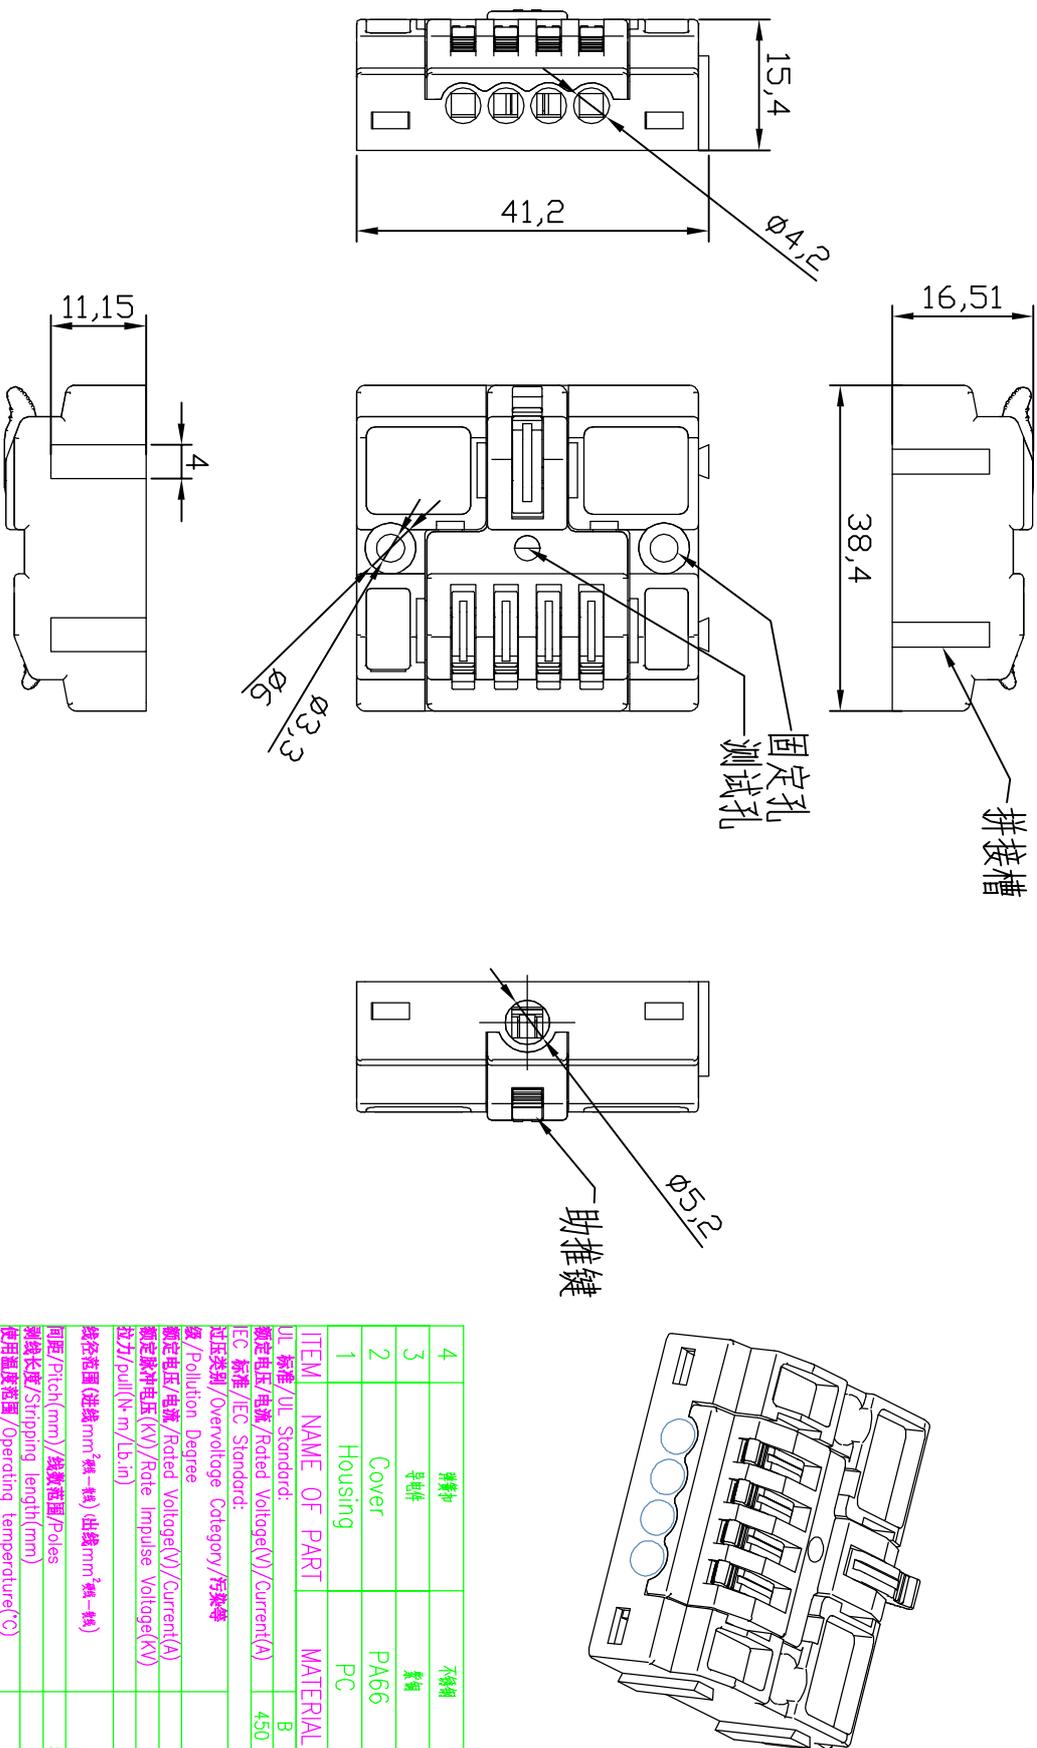

4	排线扣	不锈钢	301
3	导电件	黄铜	黄铜
2	Cover	PA66	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard: B C D			
额定电压/电涌/Rated Voltage(V)/Current(A) 450 / / 32A			
IEC 标准 / IEC Standard: / / 32A			
过压类别 / Overvoltage Category / 污染等级 III / 2			
额定电压/电涌/Rated Voltage(V)/Current(A) 450 / 32			
额定脉冲电压(KV) / Rate Impulse Voltage(KV) 8.0			
拉力/pull(N·m/Lb·in) 0.8 / 8			
线控范围 (进线mm²线-线) (出线mm²线-线) 6-4 / 4-2.5			
间距/Pitch(mm) / 线数范围/Poles 5 / N=02~5P			
剥线长度/Stripping length(mm) 10~12			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
标准颜色编号/Standard color number: /			
PANTONE / RAL			
SURFACE: /			

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: Lon ChH2020.03.24

CHKD: Gong YZ2020.03.24

DRT: CENGMZ\_2018.10.18



NAME: KV6414A

DRAWING NO.: KV6414A

TYPE: CUSTOMER\_DRAWING

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 2:1	SHEET	REV	TO
1					mm		1/1		