
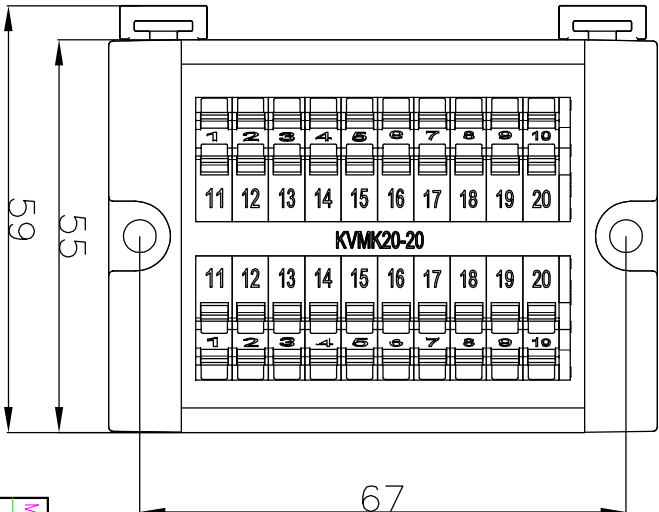
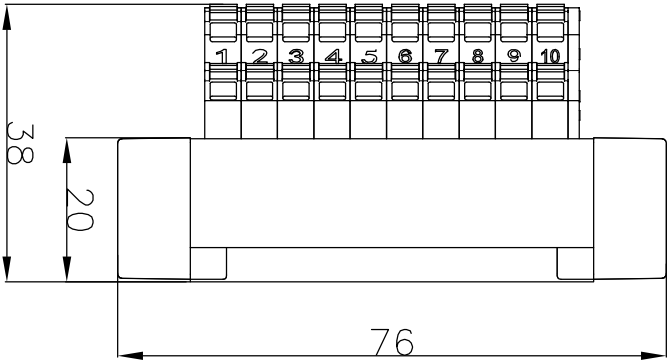
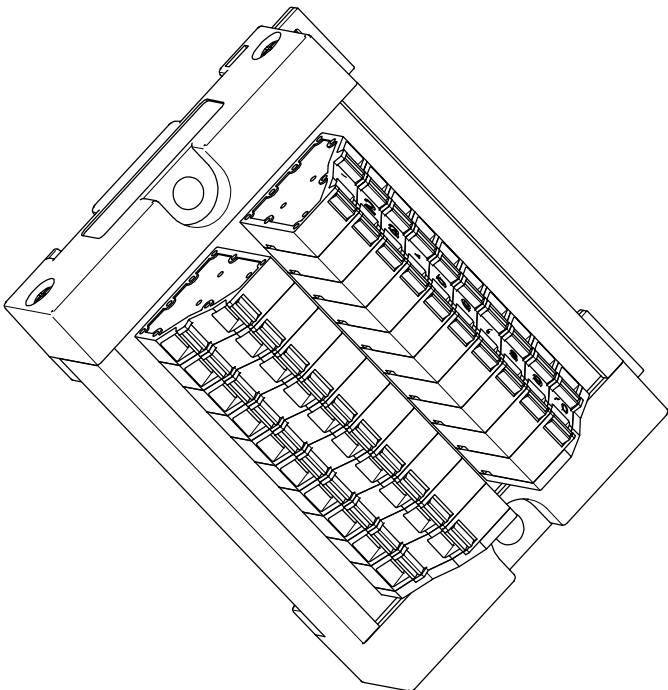


公差/General tolerances(mm)														D
0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	0.1/10
±0.12±0.18±0.22±0.26±0.31±0.37±0.57±0.80±0.93±1.05±1.15±1.60±2.20±2.50														
±2														≤

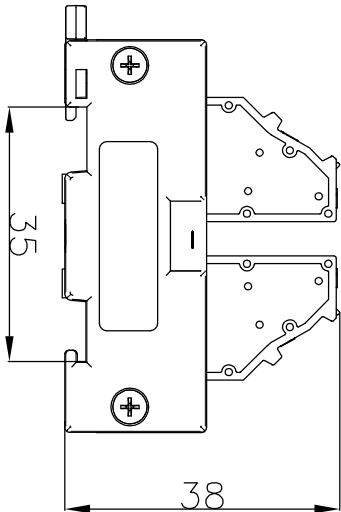

额定电压/电涌/Rated Voltage(V)/Current(A)	300/17.5	4	4	4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4	4
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4/24~12			
尺寸/Size(mm)	76*55*38			
剥线长度/Stripping length(mm)	9~11			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL:	/	SURFACE:	
MAT NO.:	/		
STATUS:	/		
APPD: Ian ChH 2023.12.14	NAME:		
CHKD: Yu JZh 2023.12.14			
DFT: CENGMZ_2023.12.14	DRAWING NO.:	KVMK20-20	REV
	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	TO-1
			SHEET
			1/1

 康伟电子有限公司
KANGWEI ELECTRONICS CO., LTD

KVMK20-20