
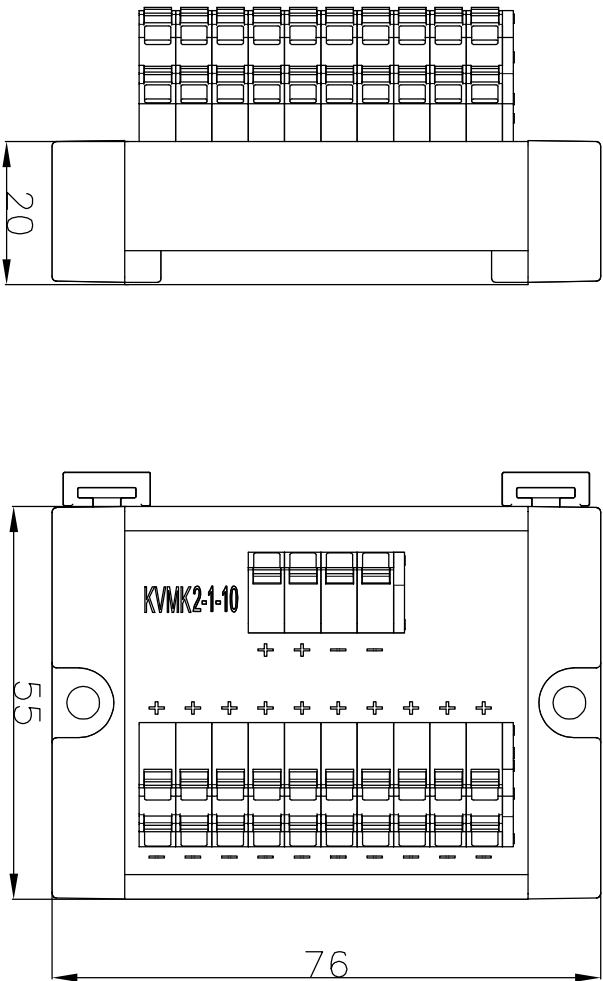
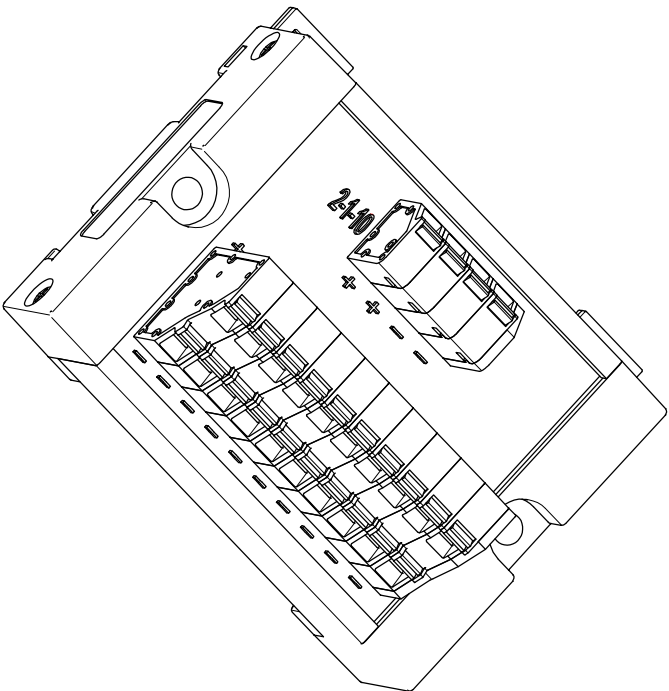


公差表 / (General Tolerances)(mm)													∅
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	≤
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													±2°

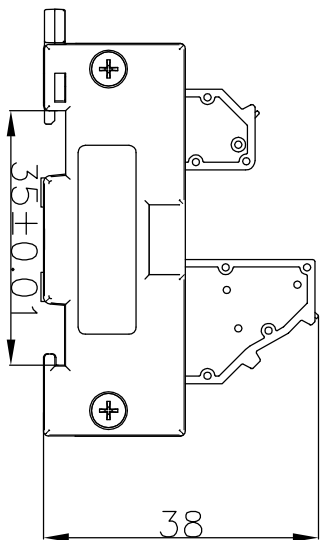

额定电压/电流 / Rated Voltage(V) / Current(A)	300 / 17.5		
额定脉冲电压(KV) / Rate Impulse Voltage(KV)	4	4	4
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² / AWG)	0.2~4 / 24~12		
尺寸/Size(mm)	76*55*38		
剥线长度/Stripping length(mm)	9~11		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		

MATERIAL:	/	SURFACE:	
MAT NO.:	/		
STATUS:	/		
APPD: Ian ChH	2023.12.14	NAME:	
CHKD: Yu JZh	2023.12.14		
DRAFT: CENG MZ	2023.12.14	DRAWING NO.:	KVMK2-1-10
		TYPE:	CUSTOMER_DRAWING
		SCALE:	2:1
		SHEET	1/1
		REV	TO-1

 康伟电子有限公司
KANGWEI ELECTRONICS CO., LTD

KVMK2-1-10

D

C

B

A