
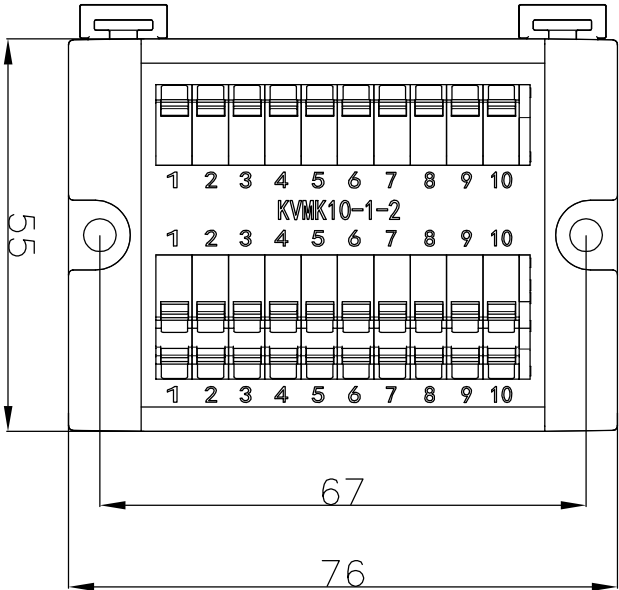
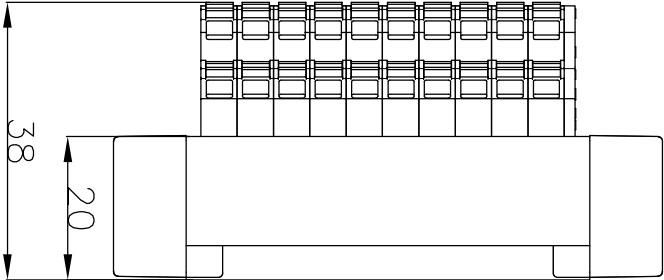
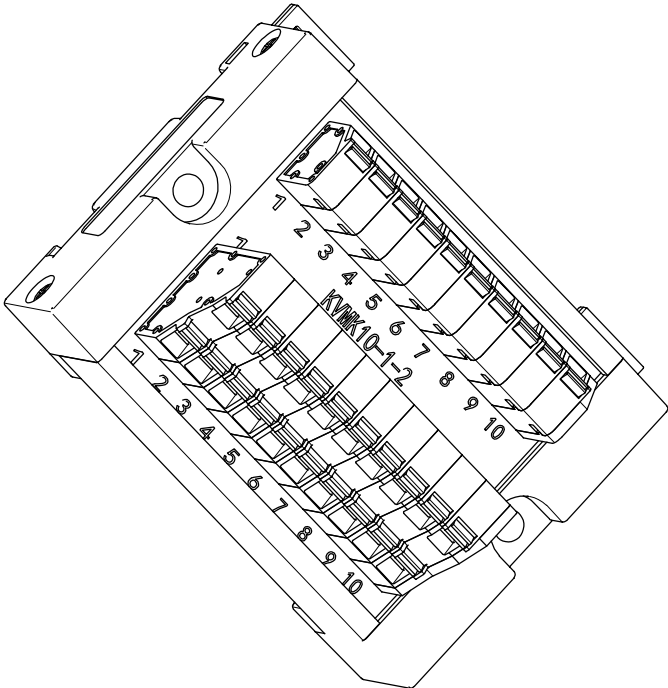


公差表 / (General tolerances)(mm)												0.1/10
0	~	>3	~	>6	~	>10	~	>18	~	>30	~	>400
3	~	6	~	10	~	18	~	30	~	50	~	500
$\pm 0.12 \pm 0.18 \pm 0.22 \pm 0.26 \pm 0.31 \pm 0.37 \pm 0.57 \pm 0.80 \pm 0.93 \pm 1.05 \pm 1.15 \pm 1.60 \pm 2.20 \pm 2.50$												$\leq$

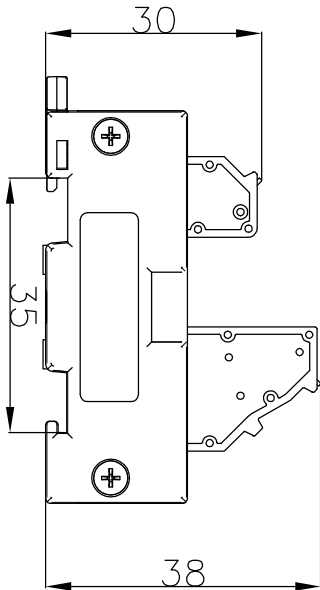

额定电压/电流 / Rated Voltage(V) / Current(A)	300 / 17.5		
额定脉冲电压(KV) / Rate Impulse Voltage(KV)	4	4	4
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² / AWG)	0.2~4 / 24~12		
尺寸 / Size(mm)	76*55*38		
剥线长度 / Stripping length(mm)	9~11		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合环保要求 / Conform to RoHS	Yes		

SURFACE:

 康伟电子有限公司
KANGWEI ELECTRONICS CO., LTD

MATERIAL:	/		
MAT NO.:	/		
STATUS:	/		
APPD: Ian ChH 2023.12.14	NAME:	KVMK10-1-2	
CHKD: Yu JZh 2023.12.14	DRAWING NO.:	KVMK10-1-2	REV TO-1
DFT: CENGMZ_2023.12.14	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	SHEET 1/1