

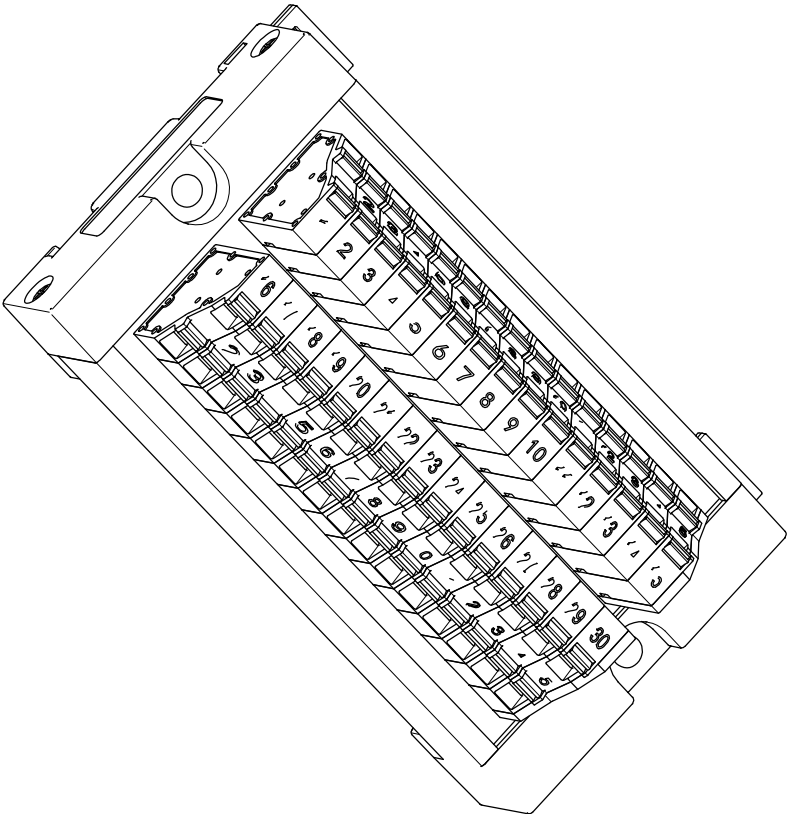


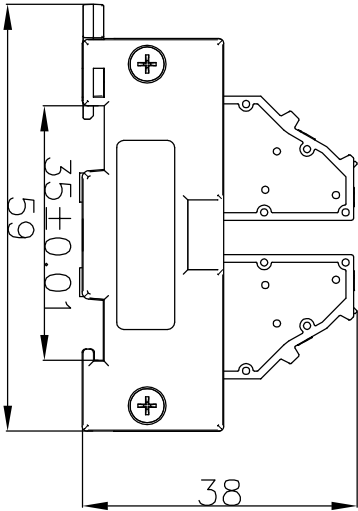

公差/General tolerances(mm)												0.1/10
0	~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50
												±2

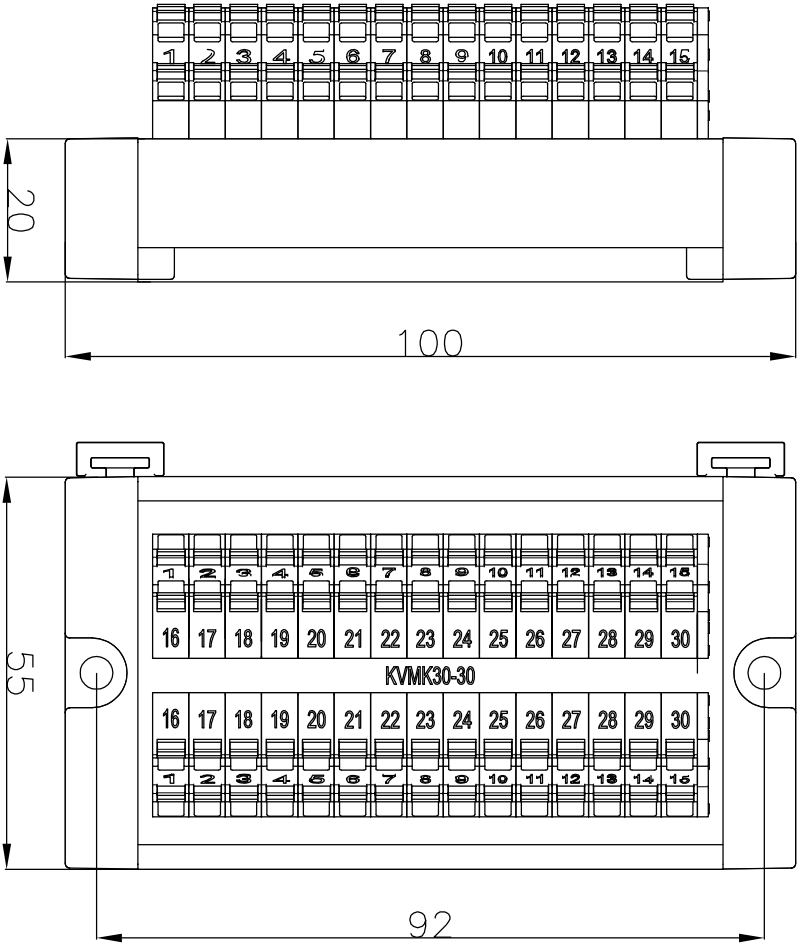

额定电压/电涌/Rated Voltage(V)/Current(A)	300/17.5	4	4	4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4/24~12			
尺寸/Size(mm)	100*56*38			
剥线长度/Stripping length(mm)	9~11			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

SURFACE:

 康伟电子有限公司
KANGWEI ELECTRONICS CO., LTD

MATERIAL: /
MAT NO.: /
STATUS: /
APPROVAL CHH 2023.12.14
CHKD: Yu JZh 2023.12.14

NAME:

KVMK30-30

DRAFT: CENGMZ_2023.12.14

DRAWING NO.: KVMK30-30



SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

REV TO-1