
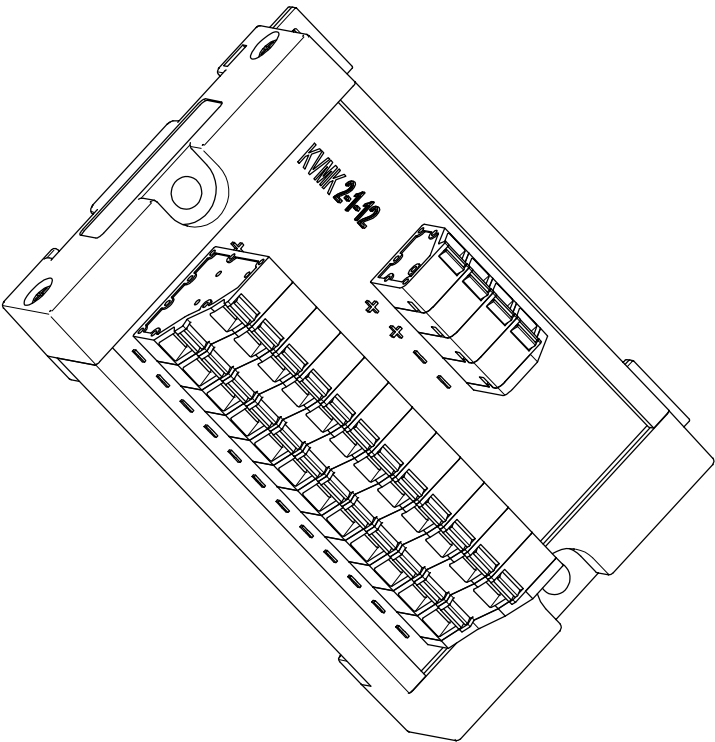
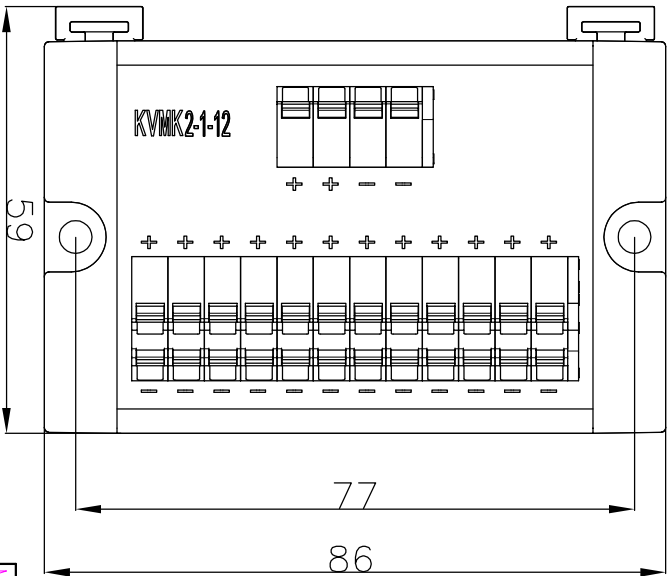
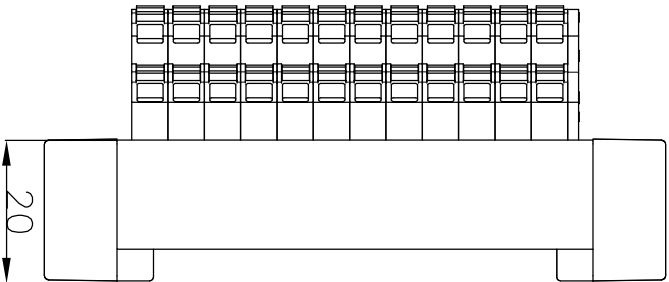


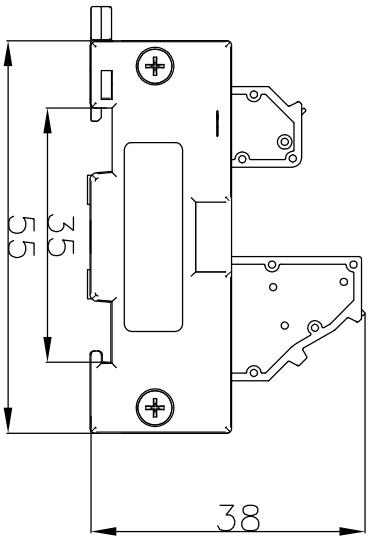

公差/General tolerances(mm)													0.1/10
0	~	>3	~	>6	~	>10	~	>18	~	>30	~	>50	0.1/10
3	~	6	~	10	~	18	~	30	~	50	~	80	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

额定电压/电涌/Rated Voltage(V)/Current(A)	300/17.5	4	4	4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4	4
线控范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4/24~12	86*55*38	9~11	-40~+105
尺寸/Size(mm)	86*55*38	9~11	-40~+105	Yes
剥线长度/Stripping length(mm)	9~11	-40~+105	Yes	
使用温度范围/Operating temperature(°C)	-40~+105	Yes		
符合环保要求/Conform to RoHS	Yes			

SURFACE:

MATERIAL:

MAT NO.:

STATUS:

APPD:lan ChH 2023.12.14

CHKD:Yu JZh 2023.12.14

DFT:CENGMZ_2023.12.14

KANGWEI 康伟电子有限公司
KANGWEI ELECTRONICS CO., LTD

NAME:

KVMK2-1-20

DRAWING NO.:

TYPE: CUSTOMER_DRAWING



SIZE: A4

mm
inch

SCALE: 2:1

REV

TO-1

SHEET

1/1