
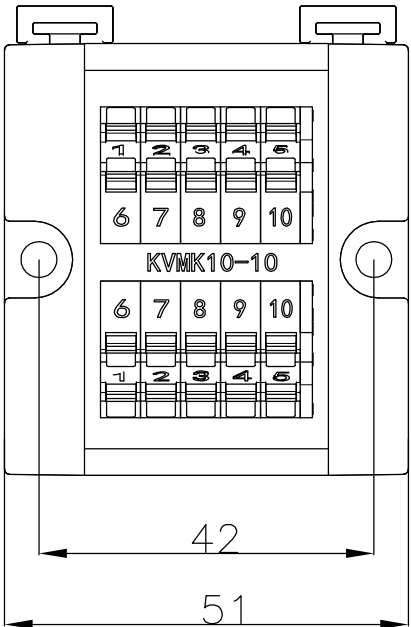
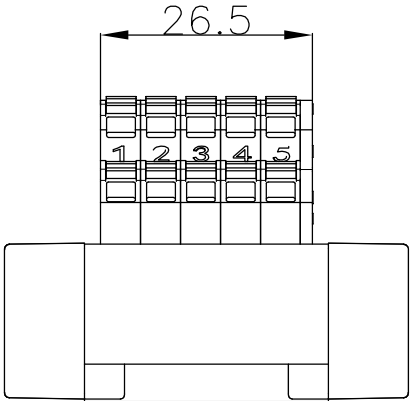
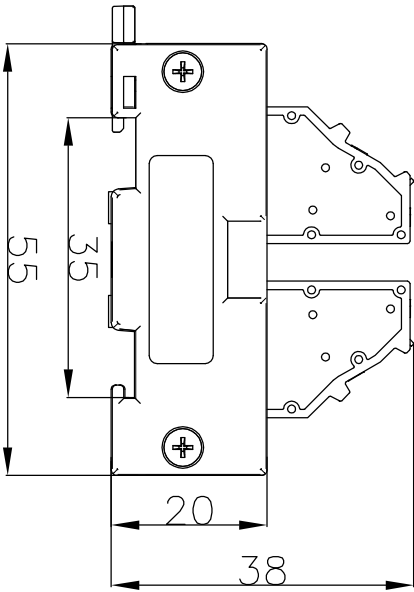


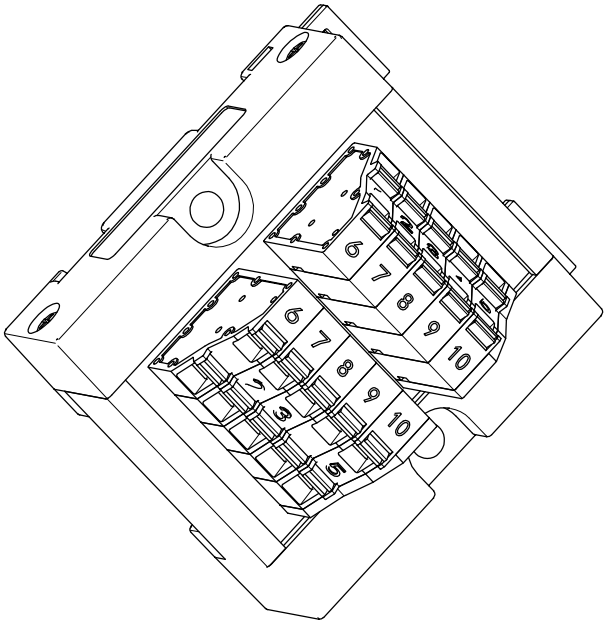

公差表 / (General tolerances)(mm)															D
0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10	
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	≤	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50 ±2															

额定电压/电涌 / Rated Voltage(V) / Current(A)	300 / 17.5	4	4	4
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)		4	4	4
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ²)		0.2~1.5		
尺寸/Size(mm)	51*38*55			
剥线长度/Stripping length(mm)	9~11			
使用温度范围 / Operating temperature(°C)	-40~+105			
符合RoHS环保要求 / Conform to RoHS	Yes			

MATERIAL:	/	SURFACE:	
-----------	---	----------	--

MAT NO.:	/	 康伟电子有限公司 KANGWEI ELECTRONICS CO., LTD		
STATUS:	/			
APPD: Ian ChH	2023.12.14			
CHKD: Yu JZh	2023.12.14			

NAME:	KVMK10-10
-------	-----------

DRAFT: CENGMZ_2023.12.14	DRAWING NO.:	KVMK10-10	REV	TO-1
SIZE: A4	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	SHEET	1/1